

VT-TPTZ10HR-2A4

2.1 MegaPixel 10x 4-IN-1 HD-TVI / AHD / CVI / CVBS PTZ Camera with 6 IR LEDs for up to 165' IR Range



VT-TPTZ10HR-2A4



VT-TPTZ10HRC-2A4



VT-TPTZ10HRF-2A4



FEATURES

- 1/3" 2.1 MegaPixel CMOS Sensor
- 30fps live view @ 1920 x 1080p
- HD-TVI / HD-CVI / AHD / 960H CVBS Video Output (Selectable)
- True Day/Night by IR Cut Filter
- Built-in 5mm to 50mm Lens offering 10x Optical Zoom
- 6 Integrated High Power IR LEDs with up to 165' IR Range
- 2DNR Noise Reduction
- 220 Presets programmed with view direction, zoom, BLC, etc
- Max manual speed 480°/sec
- 360°continuous rotation
- 16:9 Video format
- RS485 Communication / COC (Control Over Coax)
- 5.5" double layer metal body construction with IP66 Weather Resistance
- Over 1500' HD Video Transmission (Depending on cable characteristics and integrity)
- Two Configurations Available (Details on Page 2)
- 12VDC Operation
- Power Supply Included
- 3 Year Warranty

OPTIONAL ACCESSORIES:



VT-TKBD2
Transcendent 3D Keyboard Controller for Transcendent HD-TVI PTZ Camera



VT-TPT-PLMT
PTZ Pole Mount Adapter Bracket for Transcendent HD-TVI & IP PTZ Cameras




VT-TPT-CNMT
PTZ Corner Mount Adapter Bracket for Transcendent HD-TVI & IP PTZ Cameras

VT-TPTZ10HR-2A4

2.1 MegaPixel 10x 4-IN-1 HD-TVI / AHD / CVI / CVBS PTZ Camera with 6 IR LEDs for up to 165' IR Range

VT-TPTZ10HR-2A4 Specifications	VT-TPTZ10HR-2A4	VT-TPTZ10HRC-2A4	VT-TPTZ10HRF-2A4
Sensor		1/3" 2.1 MegaPixel CMOS Sensor	
Resolution		1080P (1920x1080)	
Video Output Interface		4-IN-1: HD-TVI / AHD / CVI / CVBS	
LEDs		6 Integrated High Power IR LEDs (850nm)	
IR distance		Up to 165' IR Range	
Ambient Light Detection		1-15 grades selectable (with IR illumination on)	
Lens		5mm to 50mm Lens offering 10x Optical Zoom	
Min. illumination		Color: 0.1Lux \ B/W: 0.01Lux (IR Off) / 0 Lux (IR On)	
Day/Night Operation		True Day/Night by IR Cut Filter	
Digital Noise Reduction		2D-DNR	
Pan range		360° continuous rotation	
Tilt range		0° ~ 93° auto flip 180°	
Manual Pan speed		0.02 ~ 480°/S	
Manual Tilt speed		0.02 ~ 160°/S	
Preset Points		220	
Go to Preset speed		Adjustable 1-64	
360° Scan		Adjustable 1-64	
A-B Scan		User programmable	
A-B Scan speed		Adjustable 1-64	
Dwell Preset		Adjustable 1-60s interval	
Pattern Scan		4 groups	
Guard Tours		8 groups	
Guard Points		Max.16 points, dwell time user selectable	
Time Scheduling Function		6 tasks	
PWR On Action		Memory/Pattern 1/Tour 1/360° scan/A-B scan/Park 1/None	
Park Mode		Pattern 1/Tour 1/360° scan/A-B scan/Park 1/None	
Communication Protocol		Pelco-D, Pelco-P	
Baud Rate		2400bps as default	
Communication		RS485 (+/-) / COC (Control Over Coax)	
Weather Resistance		IP66	
Operation Temperature		-40°F ~ 140°F (-40°C ~ 60°C) with included outdoor housing	
Input Voltage		12VDC	
Power Consumption		< 25W	
Lightning Protection		Transient voltage 6000V	
Dimensions (WxHxD)	5.5" x 9.5" x 9.5"	5.5" x 5.5" x 14.5"	7.5" x 7.5" x 9"

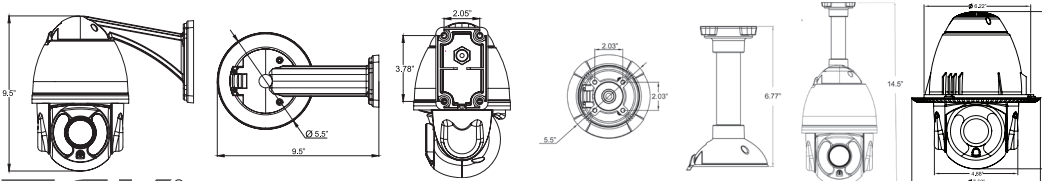

(888) VITEK-70 | WWW.VITEKCCTV.COM
28492 Constellation Road Valencia, CA 91355

An Eye On Innovation