




**FEATURES:**

- 1/2.5" 5.0 Megapixel Progressive Scan CMOS Sensor
- High Definition Analog (HDA): HD-TVI & AHD: 5.0 MegaPixel / CVI: 4.0 MegaPixel / CVBS: 960H Video Output
- 3.3-12mm Varifocal Lens
- 36 Infrared LED's with 120' IR Range
- Digital Wide Dynamic Range (D-WDR)
- True Mechanical Day/Night function by ICR
- 2D-DNR Noise Reduction
- IP66 Weather Resistance
- Supports Up The COAX Control
- Over 1500' HD Video Transmission (Depending on cable characteristics and integrity)
- Optional Junction Box Mount Available (VT-TJB01)
- 12VDC Operation
- 3 Year Warranty

Transcendent Series High Definition HD-TVI, AHD, CVI, and CVBS 4-IN-1 Cameras deliver up to 5.0 MegaPixel resolution and offer unprecedented performance and value.

These simple, easy to install, attractively styled, analog HD Cameras transmit over your existing Coaxial cable at distances up to 1500'.

**5-In-1 Digital Video Recorders Supporting HD-TVI / AHD / CVI / IP / 960H Cameras**

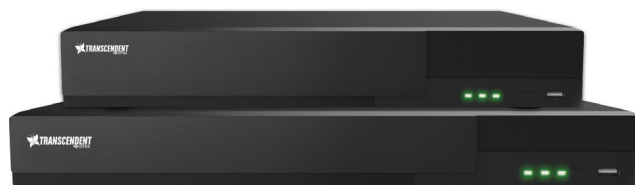


Transcendent VT-TR5HA Series 4, 8, or 16 Channel 5-In-1 Digital Video Recorders Support HD-TVI / AHD / CVI / 960H Cameras as well as IP Cameras with Up to 5 Megapixel Recording & Playback.

# Preliminary Specifications: VTC-THB5RV

Transcendent 5.0 Megapixel Indoor/Outdoor 4-IN-1 HDA  
Varifocal Bullet Camera w/36 IR LED Illumination

| Specifications                |   |
|-------------------------------|---|
| Image Sensor                  | 1/2.5" 5.0 Megapixel Progressive Scan CMOS Sensor             |
| Signal System                 | PAL/NTSC  |
| Effective Pixels              | 2592 x 1944   |
| Resolution                    | HD-TVI & AHD: 5.0 MegaPixel / CVI: 4.0 MegaPixel / CVBS: 960H |
| Video Output                  | HD-TVI / AHD / CVI / CVBS (Selectable)                        |
| Frame Rate                    | 20fps   |
| Lens                          | 3.3-12mm (Varifocal)  |
| Day/Night                     | True Day/Night by ICR   |
| Min. Illumination             | Color: 0.001 lux@F1.2, AGC ON / B/W: 0 lux (with IR ON)       |
| IR LEDs                       | 36 Dynamic Intensity LEDs                                     |
| IR Distance                   | 120'  |
| S/N Ratio                     | ≥52dB (AGC Off)   |
| WDR                           | Digital WDR   |
| Defog                         | YES   |
| Digital Noise Reduction (DNR) | 2D-DNR  |
| White Balance                 | Auto (AWB)  |
| BLC                           | YES   |
| Up the COAX Control (COC)     | YES   |
| Transmission Distance         | Up to 1500' (Depending on cable characteristics & integrity)  |
| Power Input                   | 12VDC   |
| Power Consumption (12VDC)     | IR Off: 120mA / IR On: 480mA                                  |
| Weather Resistance            | IP66  |
| Operation Conditions          | -4 ~ 122 / 10% ~ 90% Humidity                                 |
| Weight                        | 21.16 oz. / 1.32 lbs. / 600g                                  |
| Dimensions                    | 3.43 x 8.62" (87mm x 219mm) Dia x L                           |



### VT-TJB01

Optional Junction Box for  
Cable Management for use  
with all Transcendent Bullet  
and Turret Style Cameras