

# VTM-LED324K

32" Professional UHD 4K LED Monitor with  
HDMI, VGA and DisplayPort Inputs




Included IR  
Remote Control



## FEATURES

- 32" Wide Screen 4K UHD LED Display Panel
- 16:9 aspect ratio
- Triple HDMI, VGA, and DisplayPort Video Inputs with 1/4" Stereo Audio Input
- Resolution up to 4K UHD (3840x2160)
- 178° Horizontal Viewing Angle
- Picture In Picture (PIP) Display Option
- Side Panel Controls with included IR Remote Control
- VESA 200mm x 100mm Standard Mounting
- 50,000 Hour Panel Life
- 3 Year Warranty

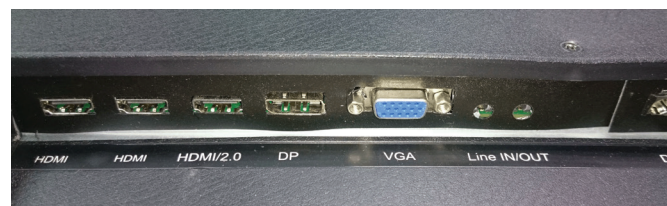

VTM-LED324K Rear Connections



(888) VITEK-70 | [WWW.VITEKCCTV.COM](http://WWW.VITEKCCTV.COM)  
28492 Constellation Road Valencia, CA 91355

### Specifications

|                       |   |
|-----------------------|---|
| Screen Size           | 32"                                     |
| Display Type          | UHD LED                                 |
| Aspect Ratio          | 16:9                                    |
| Resolution            | 4K UHD (3840x2160)                      |
| Brightness            | 350cd/m <sup>2</sup>                    |
| Pixel Pitch           | 0.1845 (H) x 0.1845 (V)                 |
| Viewing Angle (H/V)   | 178° / 178°                             |
| Video System          | NTSC/PAL                                |
| Video In/Out          | 1x VGA, 1x Display Port v1.2, 3x HDMI   |
| VGA In                | 1                                       |
| HDMI In               | 3                                       |
| DisplayPort           | 1 (v1.2)                                |
| Audio Input           | 1/8" PC                                 |
| Built In speaker      | Yes (2W x 2 )                           |
| PIP                   | Yes                                     |
| Remote                | Yes                                     |
| Vesa Mount Size       | 200mm x 100mm                           |
| Power Adapter         | 24VDC @ 3.75A (AC100/240 [50/60])       |
| Power Consumption     | 70W Max                                 |
| Operating Temperature | 32° to 104° F (0° to 40° C)             |
| Operating Humidity    | 10% to 85% relative, non-condensing     |
| Dimensions (w/Stand)  | 29.25" x 19.61" x 7.09" (743x498x180mm) |
| Weight                | 18.74 lbs (8.5kgs)                      |

