

VITEK

PERFORMANCE YOU NEED
QUALITY YOU TRUST

VTR-24/960

960 HOUR TIME-LAPSE RECORDER



Rear Of Recorder Remote Control



RECORDER FEATURES:

- ▶ VIRTUAL REAL-TIME HI-DENSITY RECORDING UP TO 24 HOUR MODE
- ▶ 15 RECORDING MODE SPEEDS
- ▶ CAMERA SWITCH OUTPUT FOR SYNCHRONIZING WITH MULTIPLEXERS
- ▶ HAND HELD IR REMOTE CONTROL INCLUDED
- ▶ AUTO REPEAT, TIMER, AND SERIES RECORDING
- ▶ DUAL-AZIMUTH 4-HEAD SCANNING SYSTEM

The VTR-24/960 Time-Lapse VCR Enables Recording Of Video Images For Up To 40 Days On One VHS Tape. Simple, Convenient, User Friendly Front Panel Controls And Wireless Remote Control Add To Its Attractive Styling And Extensive List Of Features.

VITEK

Industrial Video Products, Inc.

"Quality Products At An Affordable Price"

Specifications

VTR-24/960

GENERAL

| | |
|-------------------------------|--|
| Recording Method | Dual-Azimuth 4-Head Rotating Helical Scanning System |
| Audio Recording | In 2, 6, And 18 Hour Modes |
| Tape Speed | 33.35 M/Sec (2 Hour Mode) |
| Specified Video Cassette Tape | VHS 1/2 Inch Video Cassette |
| Recording Playback Time | L2, L6, L18, 24, 36, 48, 72, 96, 120, 168, 240, 360, 480, 720, 960 Hours (When Using T-120 Tape) |
| Fast Forward/Rewind Time | Within 3 Minutes (When Using T-120 Tape) |

VIDEO

| | |
|-----------------------|---|
| Recording Method | Luminance Signal: FM Recording / Color Signal: Down-Converted Subcarrier Direct Recording |
| Video Input | 1 Vp-p, BNC, 75 ohm, Unbalanced |
| Video Output | 1 Vp-p, BNC, 75 ohm, Unbalanced |
| Horizontal resolution | B/W Mode: 350 Lines / Color Mode: 300 Lines |

AUDIO

| | |
|------------------|---|
| Input | RCA Pin Jack More Than 47K ohms ~ 8.8dBm, Unbalanced |
| Output | RCA Pin Jack More Than 1.5K ohms ~ 7.8dBm, Unbalanced |
| Microphone Input | -60 dBs, 3.5mm Mini Jack, 10K ohm Unbalanced |



CONNECTORS

| | |
|---------------|--|
| Alarm Input | DC 4-5C (Open), DC 0-0.8V (Closed) / 5.7 ohm |
| Alarm Output | DC 4-5C (H), DC 0-0.8V (L) / 5.7 ohm |
| Panic Input | DC 4-5C (Open), DC 0-0.8V (Closed) / 5.7 ohm |
| End Input | DC 4-5C (H), DC 0-0.8V (L) / 5.7 ohm |
| Warning Input | DC 4-5C (H), DC 0-0.8V (L) / 5.7 ohm |
| Series Input | DC 4-5C (H), DC 0-0.8V (L) / 5.7 ohm |
| Series Output | DC 4-5C (H), DC 0-0.8V (L) / 5.7 ohm |
| Switch Output | DC 4-5C (H), DC 0-0.8V (L) / 5.7 ohm |
| Common | 0V (Ground) |

OTHER

| | |
|-----------------------------|--|
| Operating Temperature Range | 41°F ~ 104°F |
| Operating Humidity Range | 80% Or Less |
| Power Requirements | AC90 ~ 240V, 50/60 Hz |
| Power Consumption | 17W |
| Dimensions | 360(W) x 90(H) x 289(D) / 14.17"(W) x 3.54"(H) x 11.38"(D) |
| Weight | Approximately 8.8 lbs. (4 kg) |

REAR OF UNIT / CONNECTIONS

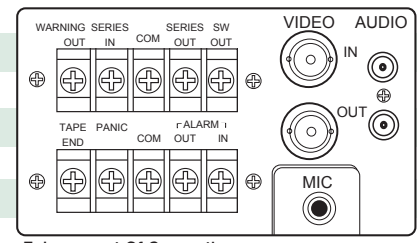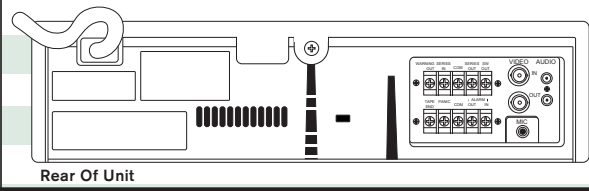

9970 GLENOAKS BLVD. UNIT B SUN VALLEY, CA 91352
 PHONE: 888-VITEK-70 818-771-0300 FAX: 818-771-0400
WWW.VITEKCCTV.COM